

DECLARATION OF PERFORMANCE

Regulation (EU) 305/2011 No. 0001 — CPR-2013/07/01

No.: 124

- | | | | |
|--|--|---|--|
| 1. Unique identification code of the product-type | RAIS VISIO 1
RAIS VISIO 2
RAIS VISIO 3 | ATTIKA VISIO 1
ATTIKA VISIO 2
ATTIKA VISIO 3 | |
| | Inset appliance burning solid fuel without hot water supply | | |
| 2. Type | VISIO 1
VISIO 2
VISIO 3 | Inset model
Corner model
3 glass model | |
| 3. Intended use | Domestic room heater | | |
| 4. Manufacturer | RAIS A/S
Industrivej 20, Vangen
DK-9900 Frederikshavn,
Denmark | Telephone
Telefax
Webmail
Homepage | +45 98 47 90 33
+45 98 47 92 91
kundeservice@rais.dk
www.rais.com |
| 5. Authorised representative | n/a | | |
| 6. System of assessment AVCP | System 3 | | |
| 7. Notified body | The notified laboratory | Danish Technological Institute - Identification no. 1235
Teknologiparken, Kongsvang Allé 29, DK-8000 Århus C | |
| | performed the determination of the product type on the basis of type testing under system 3 and issued test report | | |
| | a. 300-ELAB-2080-EN | | |

8. **Declared performance** Harmonized technical specification: EN 13229:2001/A2:2004/AC:2007

Essential characteristics	Performance			
Fire safety	<ul style="list-style-type: none"> • Insulated flue • 12.5 mm non-combustible panel board with 25 mm mineral wool 			
Reaction to fire	A1	Inset model	Corner model	3 glass model
Distance to combustible materials	Insulation thickness rear	87.5	122.5	87.5
Minimum distances [mm]	Insulation thickness sides	167.5	167.5	-
<i>For other installation or wall settings see instruction manual</i>	Insulation thickness ceiling	735.5		
	Front	1200		
	Floor	400		
Risk of burning fuel falling out	Pass			
CO-emission of combustion products	0.092 %			
Surface temperature	Pass			
Electrical safety	Pass			
Cleanability	Pass			
Maximum operating pressure	- bar			
Flue gas temperature T at nominal heat output	243 °C			
Mechanical resistance (to carry a chimney/flue)	NPD			
Thermal output				
Nominal heat output	7.9 kW			
Room heating output	7.9 kW			
Water heating output	- kW			
Energy efficiency ⁷⁷	80 %*			


9. **The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.**

Signed for and on behalf of the manufacturer by:

Henrik Nørgaard, Managing Director

Place FREDERIKSHAVN, DENMARK

Date 05-12-2014

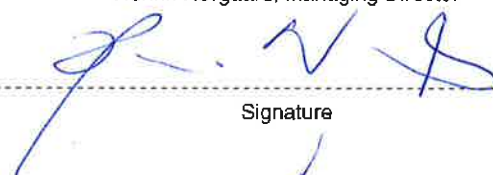

Signature